

# Electronic Displays Inc. Specialists In Large LED Displays

135 S. Church Street Addison, Illinois 60101

Phone: 630-628-0658

Toll-Free: 800-367-6056

Fax: 630-628-0936

www.electronicdisplays.com

ledsales@electronicdisplays.com

## EDV111-7120-MC

These alphanumeric message sign receives and displays information from a wireless remote device (included) or through PC software (included). Create your own logos and graphics.



**Dimensions:** 39.5"L x 4"H x 3"D

**Weight:** 14Lbs.


One line of 2" high text, 20 characters. Characters and messages can be displayed using red, green or amber colors in any combination.

### ALL UNITS INCLUDE THESE FEATURES:

- IR Remote Included
- PC-based Software Included
- 8 Display Speeds
- 7 Character Fonts
- Optional Network Card
- Real-time Clock Inside
- 3 Audible Alarms
- Built-in Animations
- Mounting Brackets Provided

### Ideal to Display:

- Safety Messages
- Retail/Commercial Messages
- Employee Messages
- Industrial Messages
- Security Messages
- Point of Purchase Messages

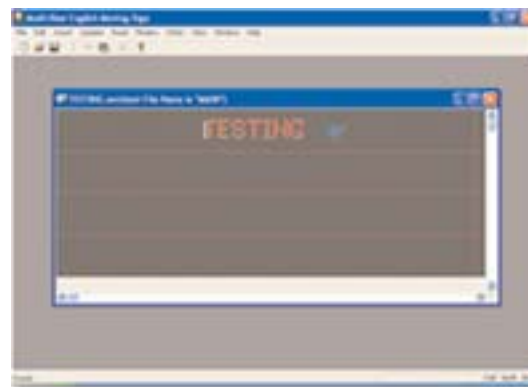

PC Software



IR Remote



Electronic Displays Inc. - [www.electronicdisplays.com](http://www.electronicdisplays.com)

[ledsales@electronicdisplays.com](mailto:ledsales@electronicdisplays.com)



**FEATURES:**

- 16 Color Combinations:**
  - 3 basic colors / 5 rainbow colors / 8 mixture colors
  - Automatic color rotation (ACL)
- 9 Fonts Available Including WIDE and BOLD**
- 41 Display Modes**
  - 6 slide modes / 6 cover modes / 6 roll modes
  - 4 interlace-slide modes / 6 interlace-roll modes
  - 4 shutter modes / 9 special effect modes
- AUTO display randomly selects one of the available display modes**
- SCROLL display mode of large continuous messages**
- ROTATE display mode for rotating of a continuous message**
- 8 message moving speeds / 8 pause periods from 0 to 60 seconds**
- 3 kinds of audible beeps during text display / 61 special international characters**
- 4 time and 5 date formats**
- Maximum 250 text files and maximum 250 graphic files**
- Text memory: 16k Bytes**
- 30 schedule tasks - enable by week, month and year**
- User friendly interface and programming via IR remote**
- RS232 serial interface. Baud rates: 1200/2400/4800/9600/19200/28800**
- Password security**

**Windows-Based Software Included. Download now from our software page.**

**Protocol to communicate with the sign EDI can provide the control codes to write a software program that will enable the user to communicate to the message sign. Please contact us to get a copy.**

<b>Power Source:</b>	<b>120 Volts AC / 60 Hz.</b>
<b>Power Consumption:</b>	<b>Max. 60 Watts</b>
<b>Current Draw:</b>	<b>1.1 Amps</b>
<b>Line Cord Length</b>	<b>12 Ft. Plug</b>
<b>Indoor / Outdoor:</b>	<b>Indoor</b>
<b>Operating Environment:</b>	<b>32° - 120° F (0° - 49°C) / 0 - 95% Humidity</b>
<b>Dimensions:</b>	<b>39.5" L x 4" H x 3.25" D</b>
<b>Weight:</b>	<b>14 Lbs.</b>
<b>Number of Digits:</b>	<b>20 - 2" characters</b>
<b>Viewing Distance:</b>	<b>100 Feet</b>
<b>LED Intensity:</b>	<b>10 MCD High-Intensity Digits</b>
<b>LED Life:</b>	<b>100,000 Hours</b>
<b>UL Listed Power Supply:</b>	<b>Yes</b>
<b>Enclosure Material:</b>	<b>Rugged Aluminum Enclosure</b>
<b>Enclosure Color:</b>	<b>Black Powder-Coat Finish (Scratch Resistant)</b>
<b>Enclosure Rating:</b>	<b>NEMA1(Standard)</b>
<b>Mounting Method:</b>	<b>Brackets Provided for Ceiling/Wall Mount</b>
<b>Limited Warranty:</b>	<b>One-Year Parts &amp; Labor</b>